

STRUB 2-way suction and filling pump

with accessories and pressure regulator

Art.-No. 954864

Description

For filling and draining lubricating and cooling fluids.

The STRUB 2-way suction and filling pump is the perfect solution for those who need fast and effective filling and draining of lubricating and cooling liquids. With its suction and discharge pump powered by compressed air, it is ideally suited for use on the drum, in machine tanks and chemical containers.

Application

The installation of the pump is very simple and quickly done. Simply screw it into the bunghole of the barrel and connect it to compressed air. With the delivery hose at the other barrel opening, you're ready to go.

The 2-way suction and filling pump creates a strong negative pressure in the container, whereby used coolant, sludge, metal residues and excess liquids can be effectively extracted.

Easy switching: With just the push of a button, the function can be reversed so that lubricating and cooling fluids as well as liquid chemicals can be pumped into the machine.

An automatic closing valve serves as inlet or outlet control and thus prevents overflow. The pump is suitable for all common drums with 3/4" RG and 2" RG threads and a drum volume of 50 - 218 liters.


STRUB 2-way suction and fill pump is incredibly powerful and can siphon 200 liters in less than 4 minutes and 200 liters in reverse in less than 5 minutes. It is the perfect tool for anyone who needs a fast and effective filling and draining of lubricating and cooling fluids. Including suction nozzles, 1.5 m hose, pipe bender and extension pipe, it is the ideal choice for those who strive for quality and performance.



The information in this technical data sheet is based on general knowledge and possible applications. Strub + Co. AG is not liable for damage resulting from improper use of the products. The measurement and production tolerances customary in the industry apply to the characteristic data given. In general, no legal binding force can be derived from these data. Our products are subject to continuous further development. Therefore, Strub + Co. AG reserves the right to change all technical data in this data sheet at any time and without prior notice.

Advantages

- Fits all common drums with ¾" RG and 2" RG threads
- Pilot valve ensures proper pressure at the drum
- Sucks 200 liters in less than 4 minutes
- Sucks 200 liters in reverse in less than 5 minutes
- Easy installation
- Easy to use
- Function change by releasing the key
- Float stop prevents overflow of the barrel
- Standard mounted with ¼" ball valve
- Delivery includes suction nozzles, 1.5m hose, pipe bender, extension pipe
- With pressure regulator

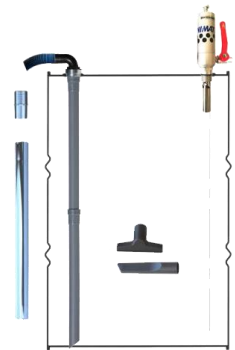

If you have any further questions, please do not hesitate to contact our sales team.

sales@strub-lube.ch

The information in this technical data sheet is based on general knowledge and possible applications. Strub + Co. AG is not liable for damage resulting from improper use of the products. The measurement and production tolerances customary in the industry apply to the characteristic data given. In general, no legal binding force can be derived from these data. Our products are subject to continuous further development. Therefore, Strub + Co. AG reserves the right to change all technical data in this data sheet at any time and without prior notice.